

# BADU® Bronze Eco VS

Exceptionally economical, exceptionally quiet and made from bronze.  
Intelligent circulation pump for discerning customers.

## Field of application

Swimming pool water circulation through a filter system.  
The pump can be installed max. 3 m above or below water level.

## Design

Monoblock-type pump with integrated strainer tank.  
The bellow-type mechanical seal is mounted on a plastic shaft protector sleeve. Heavy bronze housing, quiet running and high stability.  
Strainer capacity ..... approx. 3 l  
Strainer basket mesh size ..... approx. 3.2 x 2.6 mm

## Materials used

Pump casing ..... G-Cu Sn 10  
Housing cover ..... G-Cu Sn 10  
Diffuser ..... PA 66 GF 30  
Impeller ..... PP GF 30  
Strainer basket ..... PP  
Lid ..... PC, transparent/PA 66 GF 30  
Mechanical seal ..... carbon/ceramic/NBR  
Screws ..... stainless steel  
Elastomers ..... NBR/viton

Can be controlled using the BADU Eco Logic remote control.  
See page 118.

| Technical data at 50/60 Hz                                           |          | BADU Bronze Eco VS  |
|----------------------------------------------------------------------|----------|---------------------|
| Inlet Sa/outlet connection Da Rp <sup>2)</sup>                       |          | 2/2                 |
| Rec. inlet/outlet pipe, PVC pipe, d <sup>4)</sup>                    |          | 63/63               |
| Power input P <sub>1</sub> /output P <sub>2</sub> <sup>1)</sup> (kW) | 1~ 230 V | 0.03-1.40/0.01-1.10 |
| Rated current (A)                                                    | 1~ 230 V | 0.50-6.10           |
| Net weight (kg)                                                      | 1~       | 24.00               |

For more detailed information regarding the motor protection please see page 143.

Technical data may vary.


| Article no   | Description        | Voltage  | Power output P <sub>2</sub> |
|--------------|--------------------|----------|-----------------------------|
| 210.1022.138 | BADU Bronze Eco VS | 1~ 230 V | 1.10 kW                     |

Universal opening device included in delivery. See page 132.



< Motor display with intuitive control

Circulation pumps, energy-saving

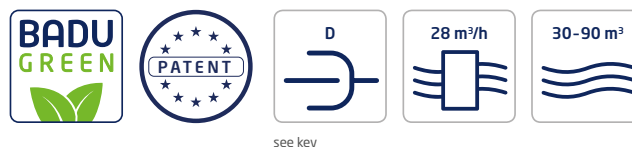

## Performance

## Dimensions

Detailed dimensions available on request or at badu.de

