


# BADU<sup>®</sup> 45/16

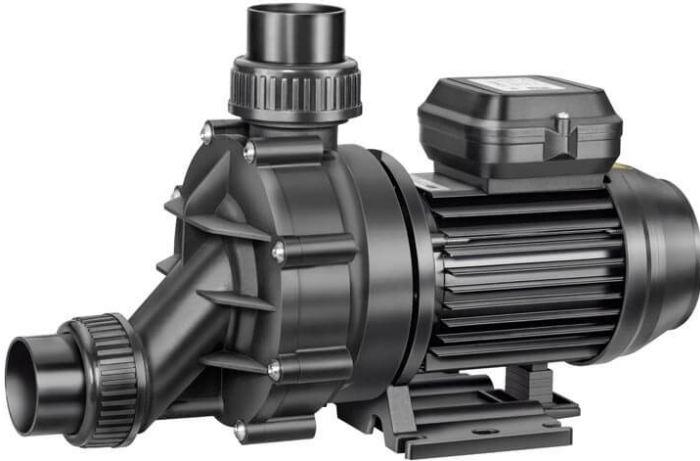

Solid, small jet pump with self-draining unit.  
For bath tubs and whirlpools.

## Details

Flow rate Q in m<sup>3</sup>/h: 20

Motor performance in kW (P2): 0,80

Pool size in m<sup>3</sup>: 1 - 30

Total head H in m WS: 12

## Materials used

Gland housing: PP TV 40, PP TV 40

Mechanical seal: carbon / ceramic / NBR

Pump casing: PP TV 40

Screws: Messing / Edelstahl

## Field of application

The BADU 45 self-draining pump series with flow rates ranging from 7.5 m<sup>3</sup>/h to 15 m<sup>3</sup>/h at 11 m are the perfect jet pumps for bath tubs.

## Design

Monoblock-type pump with integrated self-draining unit. The bellow-type mechanical seal is mounted on a plastic shaft protector sleeve. Motor/pump shaft has no contact with the pool water providing complete electrical separation.

## Motors

Special motors on request.

## Miscellaneous

The above mentioned pumps can be used for pool water with a salt concentration of up to 0.5%, i.e. 5 g/l.

For higher salt concentrations please contact the company SPECK Pumpen.

## Downloads

- [Spare parts list](#)
- [Catalogue page](#)
- [Characteristics](#)
- [EC declaration of conformity](#)
- [Dimensional drawing](#)