


# CY-6091-MK-TOE

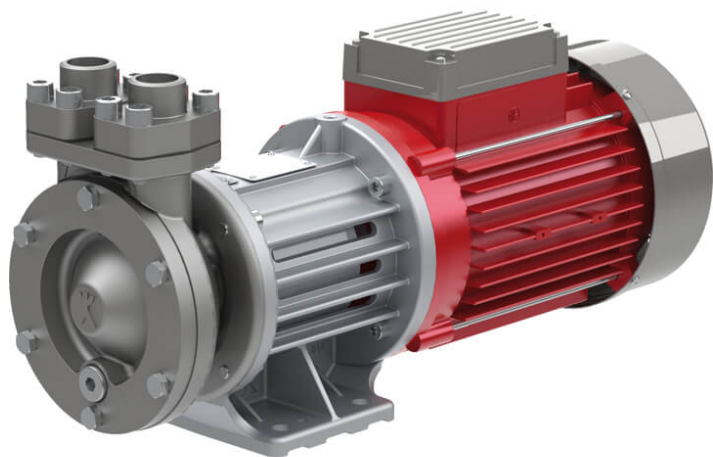

These non-self-priming regenerative turbine pumps with magnetic coupling are characterised by high pressure at low flow rates and a compact construction. Thanks to the magnetic coupling they are leakage and maintenance-free. They can be applied in circuits for liquids not containing solid matter, for example in cooling circuits or in temperature control units, among others.

## Details

Flow rate Q in l/min: max. 200

Motor performance in kW (P<sub>2</sub>): 2,80 - 5,50

Total head H in m WS: max. 90