


Piston pump BS 25

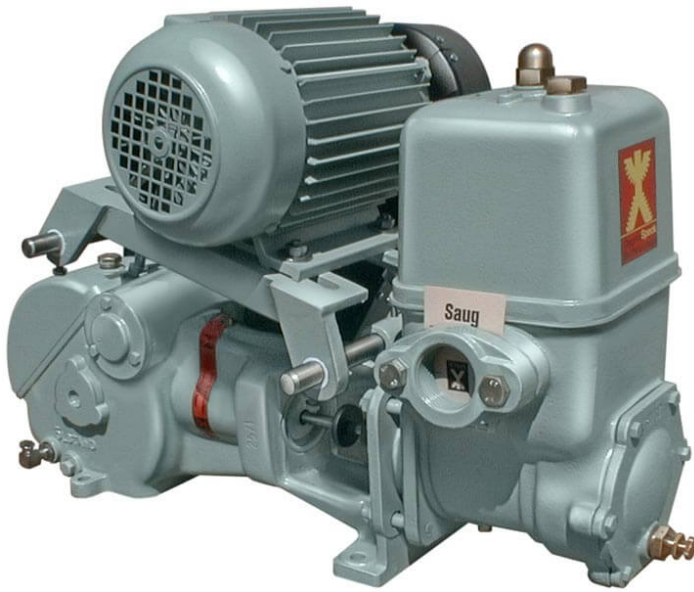

Piston pumps with electrically isolated motor drawn rocker, V-belt pulley, V-belt, membrane safety valve (type tested), poppet valve and belt guard.

Details

Flow rate Q in m³/h: max. 2,50

Motor performance in kW (P2): 0,55

Total head H in m WS: max. 60

Field of application

- > Water supply
- > Agriculture
- > Rainwater utilisation
- > Industry
- > Shipping

Miscellaneous

- > Saline water
- > Higher performances

Downloads

- [General operation manual](#)
- [Spare parts list](#)

- Catalogue page
- EC declaration of conformity
- Dimensional drawing