


Metering pump M2

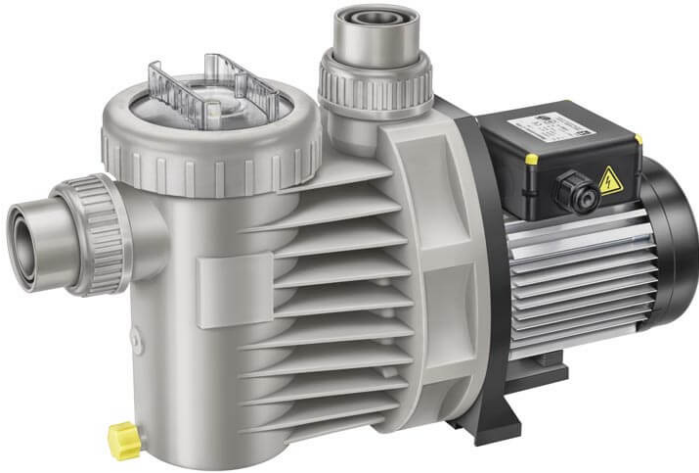

These self-priming pumps have been specially developed with corrosion-resistant materials for continuous analysis of pool water. The pumps are very easy to maintain because of their self-priming capacity and monoblock type. Special union with a glue socket is included in delivery.

Details

Flow rate Q in m³/h: 4, 4

Motor performance in kW (P2): 0,25

Strainer basket in mm: approx. 2.8 x 2.8

Strainer capacity in l: ca. 0,5, ca. 0,5

Total head H in m WS: 8, 8

Field of application

Metering pumps for continuous analysis of pool water in public swimming pools.

Design

Monoblock pump with integrated strainer. Bellow-type mechanical seal mounted on a plastic impeller hub. Electrical separation.

Downloads

- [3D model](#)
- [Catalogue page](#)
- [Characteristics](#)
- [EC declaration of conformity](#)
- [Dimensional drawing](#)