


# Side channel pump ASKG 2001 - 2008

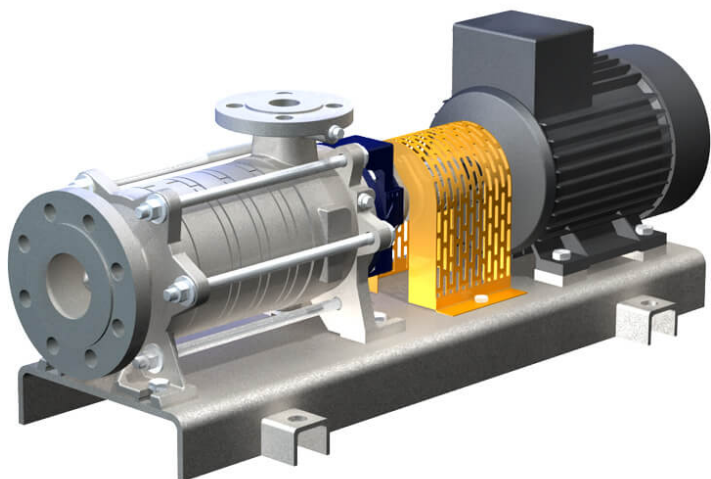

These self-priming, gas handling side channel pumps have a very low NPSH level, thanks to the NPSH suction level, which is why they are used for applications in which there are difficult suction or intake conditions, for example in boiler feed pumps or condenser pumps.

## Details

Flow rate  $Q$  in  $\text{m}^3/\text{h}$ : max. 3.0

Motor performance in kW (P2): 0,37 - 3,00

Total head  $H$  in m WS: max. 184